




102 Wolcott Rd
 Waterbury, CT 06716
 Phone (800)516-0307
 Fax (203)753-6687
 sales@torrington-machinery.com

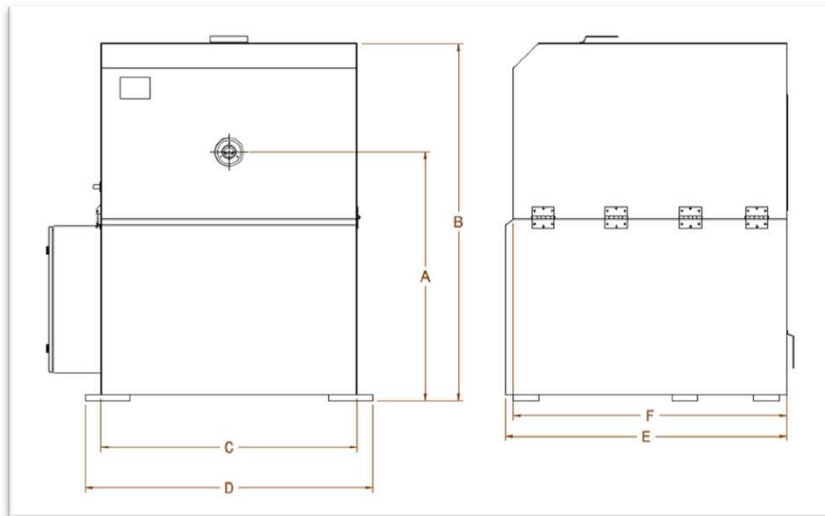

TORRINGTON DIE CLOSING SWAGER

DIMENSIONS		211DC	322DC	434DC	1047DC
A		40	40	40	44-1/2
B		55.25	57.75	62.5	73-7/8
C		28	40.5	48	64.75
D		31	45.5	53	69
E		36	44.5	62	68.75
F		35	43.25	69	64.75
WEIGHT (lb)	FLOOR	1030	3150	3570	9200
	QUIET	1100	2475	4850	10050

ENGINEERING SELECTION CHART

CAPACITY SOLID (60,000 psi material)	3/16	3/8	*	1-1/2
CAPACITY, TUBING	1/2	3-1/32	1-3/4	2-1/16
(With standard dies)		1-1/2	2-1/2	3-1/2
Capacity on standard AN terminal	1/16" Cable	3/8" Cable	9/16" Cable	1" Cable
Maximum total die opening	.210	.625	.625	.625
Diameter hole through wedge tube	5/8	1	1-25/32	2-1/8
Largest terminals which will pass				
Through spindle				
Fork end	*	AN667-8, 1/4" Cable	AN667-10, 5/16" Cable	AN667-24, 3/4" Cable
Eye end	*	AN668-8, 1/4" Cable	AN668-10, 5/16" Cable	AN668-24, 3/4" Cable
Turnbuckle	*	AN669-8, 1/4" Cable	AN669-10, 5/16" Cable	AN669-24, 3/4" Cable
Motor Hp	38	36	38	41 3/8

*Consult engineering department